


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

IDENTIFICATION LABEL

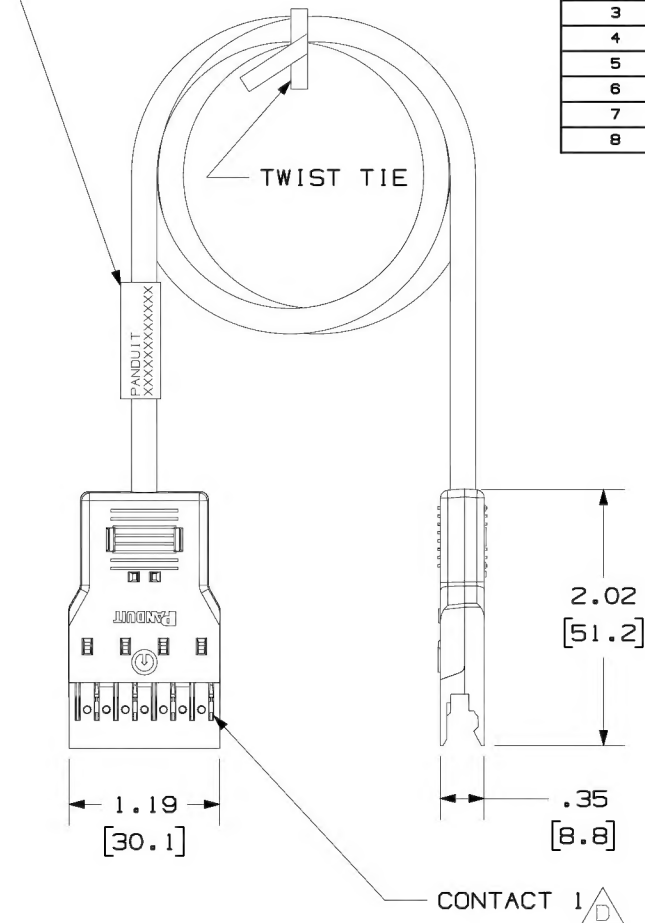

CONTACT	WIRE COLOR
1	WHITE/BLUE
2	BLUE
3	WHITE/ORANGE
4	ORANGE
5	WHITE/GREEN
6	GREEN
7	WHITE/BROWN
8	BROWN

NOTES:

1. SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AND TO INDICATE PACKAGE QUANTITY.
2. 110 CONNECTORS ON BOTH ENDS. THE PATCH CORDS CAN BE USED WITH PAN-PUNCH™ 110 CONNECTING BLOCKS.
3. FEATURES INCLUDE A CLEAR CAP TO ENSURE PROPER WIRE SEQUENCE AND CONNECTOR ORIENTATION. RETAINING CLIPS SECURE THE JACKET CLOSE TO THE POINT OF TERMINATION WHICH MINIMIZES WIRE UNTWISTING. INTEGRAL STRAIN RELIEF MINIMIZES STRESS ON WIRES DURING DISCONNECTION.
4. POLARIZED TO PREVENT REVERSE INSTALLATION TO CONNECTOR BLOCK.
5. CATEGORY 5 UNSHIELDED TWISTED PAIR CABLE WITH 24AWG STRANDED TINNED COPPER CONDUCTORS.
6. DIMENSIONS IN PARENTHESES ARE IN METRIC.



PANDUIT P/N	MIN. CABLE LENGTH	WEIGHT
P110PC4IG2	2 FT.	.83 LB/ 10 PCS (376.5 g/ 10PCS)
P110PC4IG3	3 FT.	1.05 LB/ 10 PCS (476.3 g/ 10PCS)
P110PC4IG4	4 FT.	1.25 LB/ 10 PCS (566.9 g/ 10PCS)
P110PC4IG5	5 FT.	1.46 LB/ 10 PCS (662.2 g/ 10PCS)
P110PC4IG6	6 FT.	1.67 LB/ 10 PCS (757.5 g/ 10PCS)
P110PC4IG7	7 FT.	1.88 LB/ 10 PCS (852.8 g/ 10PCS)
P110PC4IG8	8 FT.	2.09 LB/ 10 PCS (948.0 g/ 10PCS)
P110PC4IG9	9 FT.	2.30 LB/ 10 PCS (1043.3g/ 10PCS)
P110PC4IG12	12 FT.	2.93 LB/ 10 PCS (1329.0g/ 10PCS)
P110PC4IG15	15 FT.	3.56 LB/ 10 PCS (1614.8g/ 10PCS)
P110PC4IG18	18 FT.	4.19 LB/ 10 PCS (1900.6g/ 10PCS)
P110PC4IG.5M	.5M	.75 LB/ 10 PCS (342.0 g/ 10PCS)
P110PC4IG1M	1M	1.09 LB/ 10 PCS (494.4 g/ 10PCS)
P110PC4IG1.5M	1.5M	1.44 LB/ 10 PCS (653.2 g/ 10PCS)
P110PC4IG2M	2M	1.78 LB/ 10 PCS (807.4 g/ 10PCS)
P110PC4IG3M	3M	2.48 LB/ 10 PCS (1120.4g/ 10PCS)
P110PC4IG4M	4M	3.16 LB/ 10 PCS (1433.4g/ 10PCS)
P110PC4IG5M	5M	3.85 LB/ 10 PCS (1748.1g/ 10PCS)
P110PC4IG6M	6M	4.54 LB/ 10 PCS (2061.0g/ 10PCS)



SIZE

A

DRAWING FILENAME

M00228BD_DC_01B.PRT

TITLE

CATEGORY 5 110 PATCHCORD
CUSTOMER DRAWING



PANDUIT^R CORP.
TINLEY PARK, IL 60477

I.I. NUMBER

PRODUCT SPEC

WORK INSTRUCTION

SCALE


NONE

PART NO.

P110PC4****

DRAWING NO.

00228-08



DRAWN BY

JSP

DATE

3-25-98

CHK'D

FJD

ALL DIMENSIONS ARE GIVEN IN INCHES,
UNLESS OTHERWISE SPECIFIED.
DIMENSIONAL TOLERANCES ARE:
(.X) ± .03(.8) (.XXX) ± .01(.3)
(.XX) ± ANGLES ±

REVIEW DRAWING NUMBERS



2	4-12-02	MDJR		E. REPLACED ** WITH IG IN PART#. D. ADDED TEXT NOTE. C. COMBINED SHEETS 1 & 2. B. UPDATED TITLE BLOCK.	00228-08								
1	7-16-98	JSP	FJD	A. ALL P/NS CHANGED.	00228-08	FJD	FJD						
R	3-25-98	JSP	FJD	RELEASED TO PRODUCTION.	00228-08	FJD	FJD						
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH	CHK'D			